KANAGAWA INSTRUMENTS

Float Level Switch

Model: FCLS



Highly abrasion and tear resistant and suitable for immersion in cutting fluids and coolant. Ideal for use on industrial machinery and in installation plants.

Three watertight chambers level regulator with freely suspended trim variation. Unlike traditional floats that float on the water surface, the FCLS thanks to its special construction with integrated counterweight, remains underwater. Used in couple with another of the same type allows you to adjust the levels of minimum and maximum. It's also possible to use a third and fourth regulator for alarm of the respective levels.

- **Casing:** Polypropylene
- **Density:** 950/1050 Kg/m³
- **Grommet:** EPDM

PUR - FFR105OP 4G0,75 SPDT-NO/NC	10 / 20 (m)	10(8)A 250V	max.+80°C (+176°F)	max.20m (65,6ft)	20°±5°

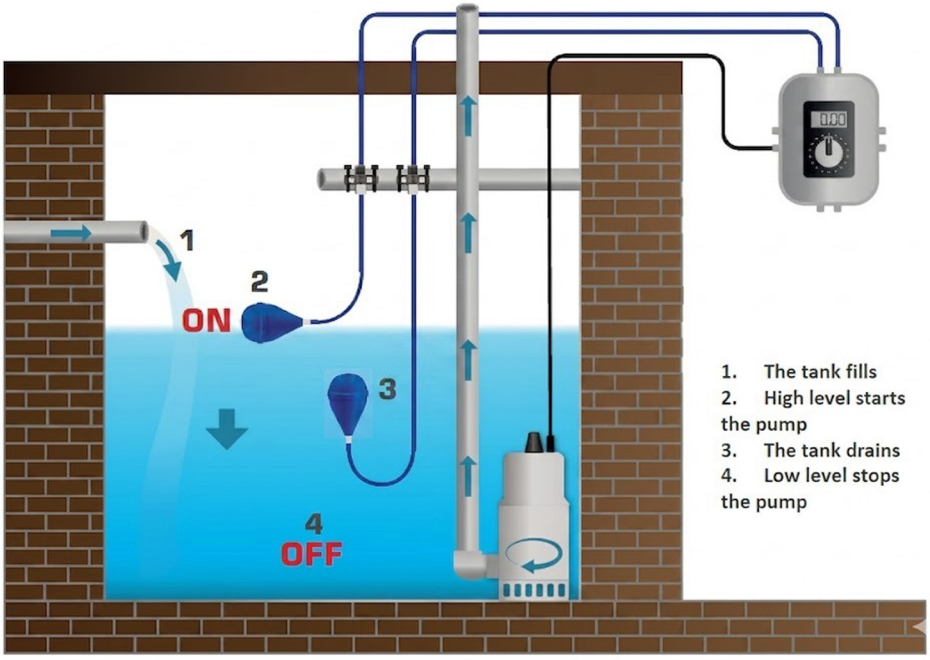

1. The tank fills
2. High level starts the pump
3. The tank drains
4. Low level stops the pump



1. First Chamber: one float switch
2. Second Chamber with counterweight inside
3. Third Chamber of air

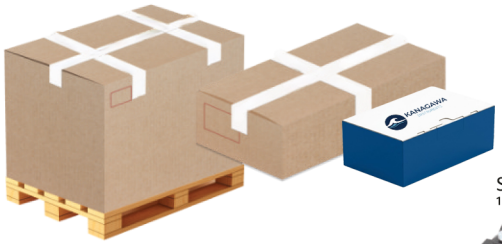

1 Box 70x29,5xH21,5 = 5pcs
1 Pallet 80x120xH100 = 112pcs
1 Pallet 83x113xH100 = 100pcs

Starfish Viton [1]



Koala [1]



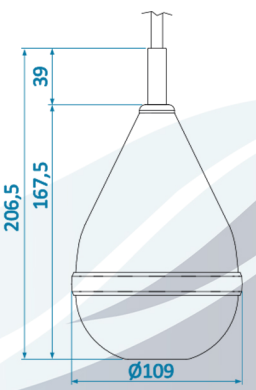

CE UKCA REACH & RoHS COMPLIANT

Product color may vary depending on the production batch.